
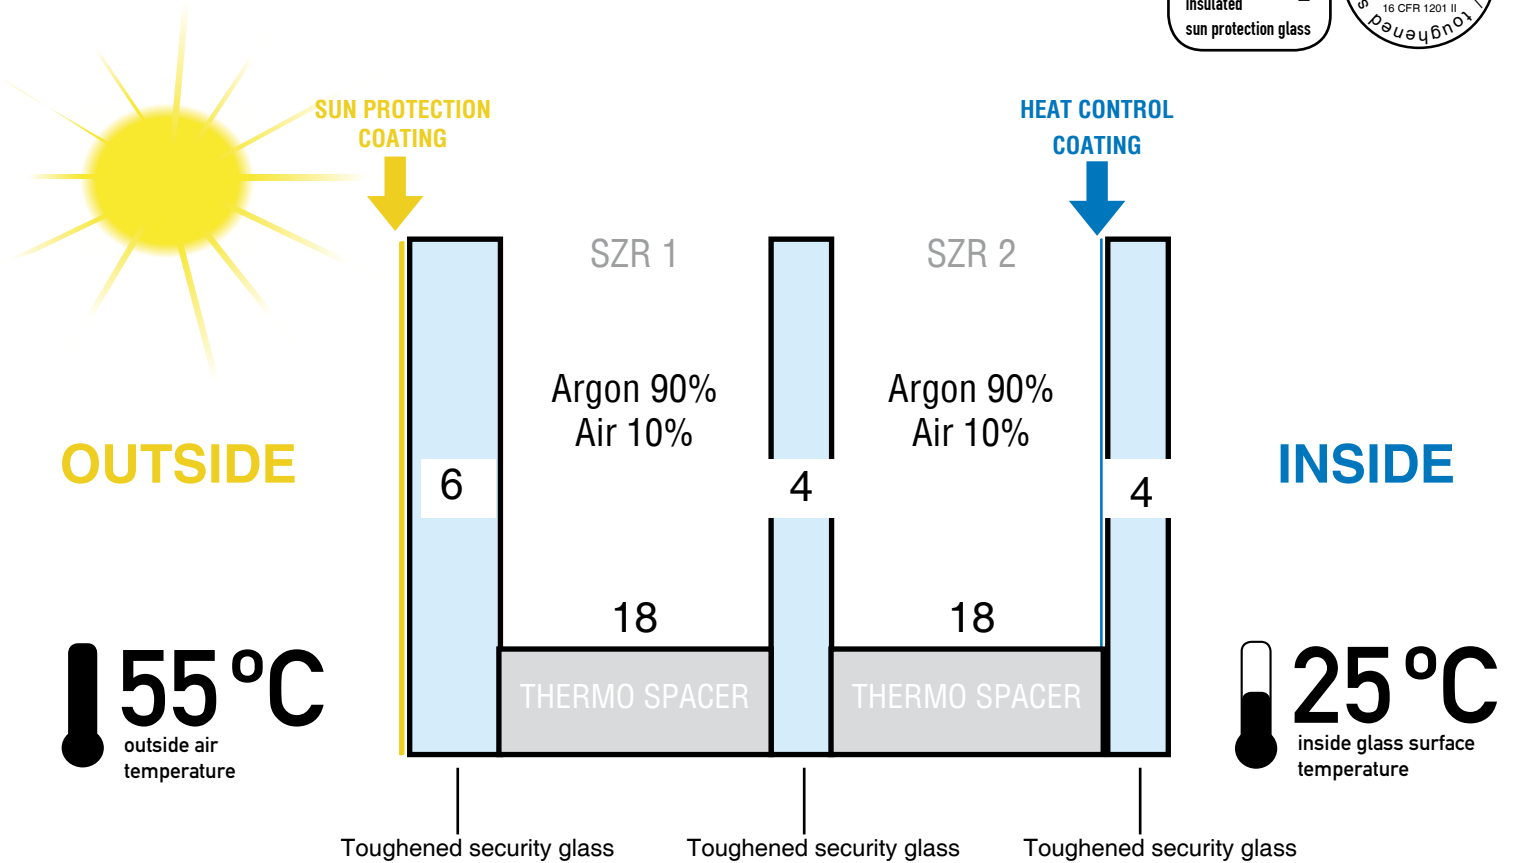


GLASS SPECIFICATION

TRIPLE INSULATED · SUN PROTECTION · ULTRA SELECTIVE · SECURITY GLASS

COLOR : NEUTRAL

Glass Spacer: Fiber glass



Light Transmission = L_{TR}	51 % EN 410-2011
Solar Energy = g	25 % EN 410-2011
Selectivity	2,0
U_{cog} Value = u_g European / metric	0,5 W/m ² K EN 673-2011
U_{cog} Value = u_g US american / imperial	0.088 Btu/ft ² hr °F NFRC 102-2010
R_{cog} Value = r US american / imperial	11.36 ft ² hr °F/Btu ASTM

Thickness: 50 mm - Glass Spacer: Fiber glass