



## GLASS SPECIFICATION

TRIPLE INSULATED · Standard Glass

Glass Spacer: Aluminium

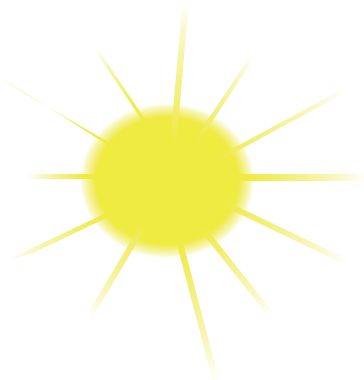

OUTSIDE

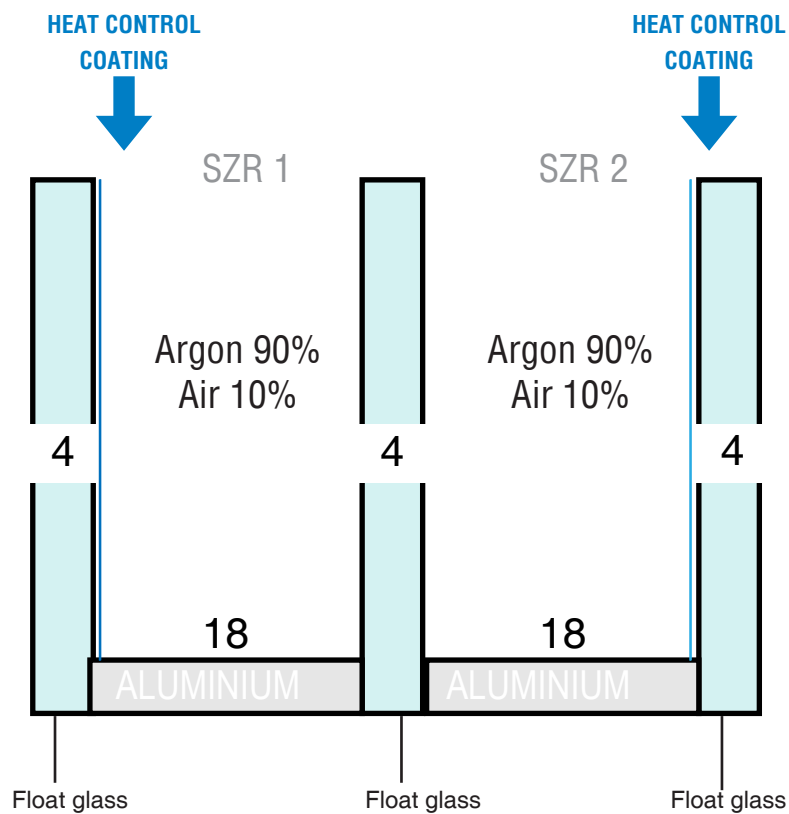

INSIDE

Light Transmission = $L_{TR}$	71 % EN 410-2011
Solar Energy = g	50 % EN 410-2011
Selectivity	1,4
$U_{cog}$ Value = $u_g$ European / metric	0,5 W/m <sup>2</sup> K EN 673-2011
$U_{cog}$ Value = $u_g$ US american / imperial	0.088 Btu/ft <sup>2</sup> hr °F NFRC 102-2010
$R_{cog}$ Value = r US american / imperial	11.36 ft <sup>2</sup> hr °F/Btu ASTM

Thickness:48 mm - Glass Spacer: ALU